


XERDO BRECHA 73, TA Mexico -- 1060 kHz

Daytime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 7.0 kW
Graph Maximum: 2000 mV/m

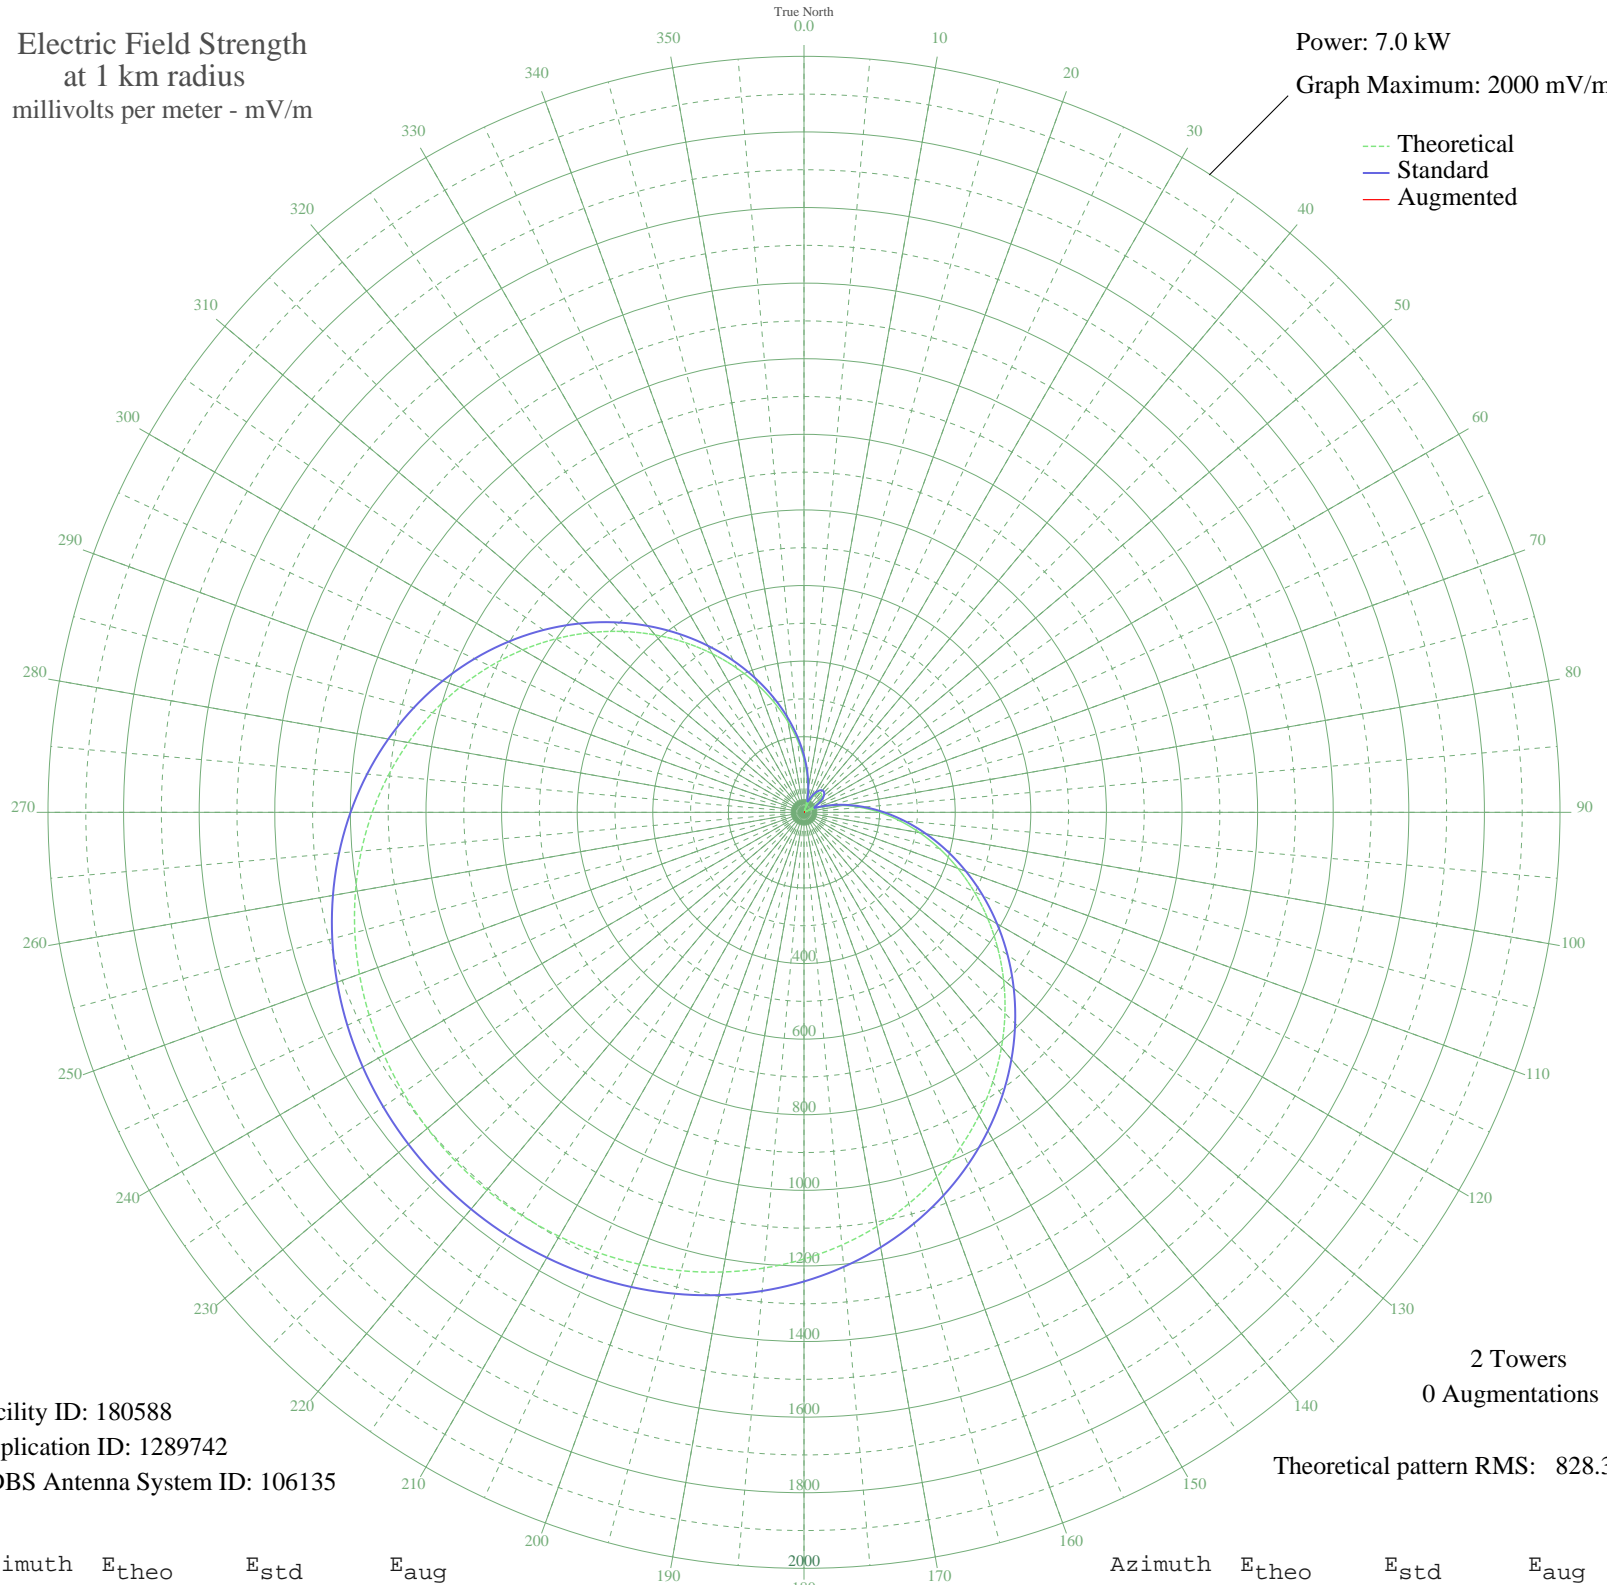

Facility ID: 180588
Application ID: 1289742
CDBS Antenna System ID: 106135

2 Towers
0 Augmentations
Theoretical pattern RMS: 828.36

Azimuth	E _{theo}	E _{std}	E _{aug}
0	140.39	150.18	
5	95.56	104.37	
10	55.58	65.04	
15	20.79	36.07	
20	8.52	30.08	
25	32.11	44.29	
30	49.80	59.66	
35	61.46	70.63	
40	67.00	75.99	
45	66.38	75.39	
50	59.61	68.87	
55	46.74	56.87	
60	27.86	41.00	
65	3.11	28.91	
70	27.32	40.59	
75	63.17	72.28	
80	104.15	113.07	
85	149.90	159.99	
90	199.98	211.94	
95	253.93	268.17	
100	311.19	328.01	
105	371.19	390.80	
110	433.29	455.86	
115	496.82	522.45	
120	561.12	589.87	
125	625.49	657.39	
130	689.27	724.30	
135	751.80	789.91	
140	812.49	853.60	
145	870.79	914.79	
150	926.23	972.97	
155	978.40	1027.72	
160	1026.97	1078.70	
165	1071.72	1125.67	
170	1112.47	1168.44	
175	1149.14	1206.94	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

10 Nov 2011

Prepared by Audio Division, Media Bureau
Federal Communications Commission

Azimuth	E _{theo}	E _{std}	E _{aug}
180	1181.72	1241.14	
185	1210.24	1271.08	
190	1234.78	1296.83	
195	1255.44	1318.52	
200	1272.34	1336.27	
205	1285.62	1350.20	
210	1295.38	1360.45	
215	1301.72	1367.11	
220	1304.71	1370.25	
225	1304.38	1369.90	
230	1300.73	1366.06	
235	1293.70	1358.69	
240	1283.25	1347.72	
245	1269.25	1333.03	
250	1251.61	1314.50	
255	1230.18	1292.01	
260	1204.86	1265.43	
265	1175.53	1234.64	
270	1142.14	1199.59	
275	1104.64	1160.23	
280	1063.08	1116.61	
285	1017.56	1068.82	
290	968.24	1017.06	
295	915.39	961.59	
300	859.35	902.77	
305	800.53	841.04	
310	739.42	776.92	
315	676.59	711.00	
320	612.64	643.91	
325	548.23	576.36	
330	484.03	509.04	
335	420.73	442.70	
340	359.00	378.04	
345	299.50	315.78	
350	242.85	256.61	
355	189.64	201.18	