


WDWD ATLANTA, GA BMML-20090916ADR 590 kHz

Daytime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 12.0 kW
Graph Maximum: 2000 mV/m

--- Theoretical
— Standard
— Augmented

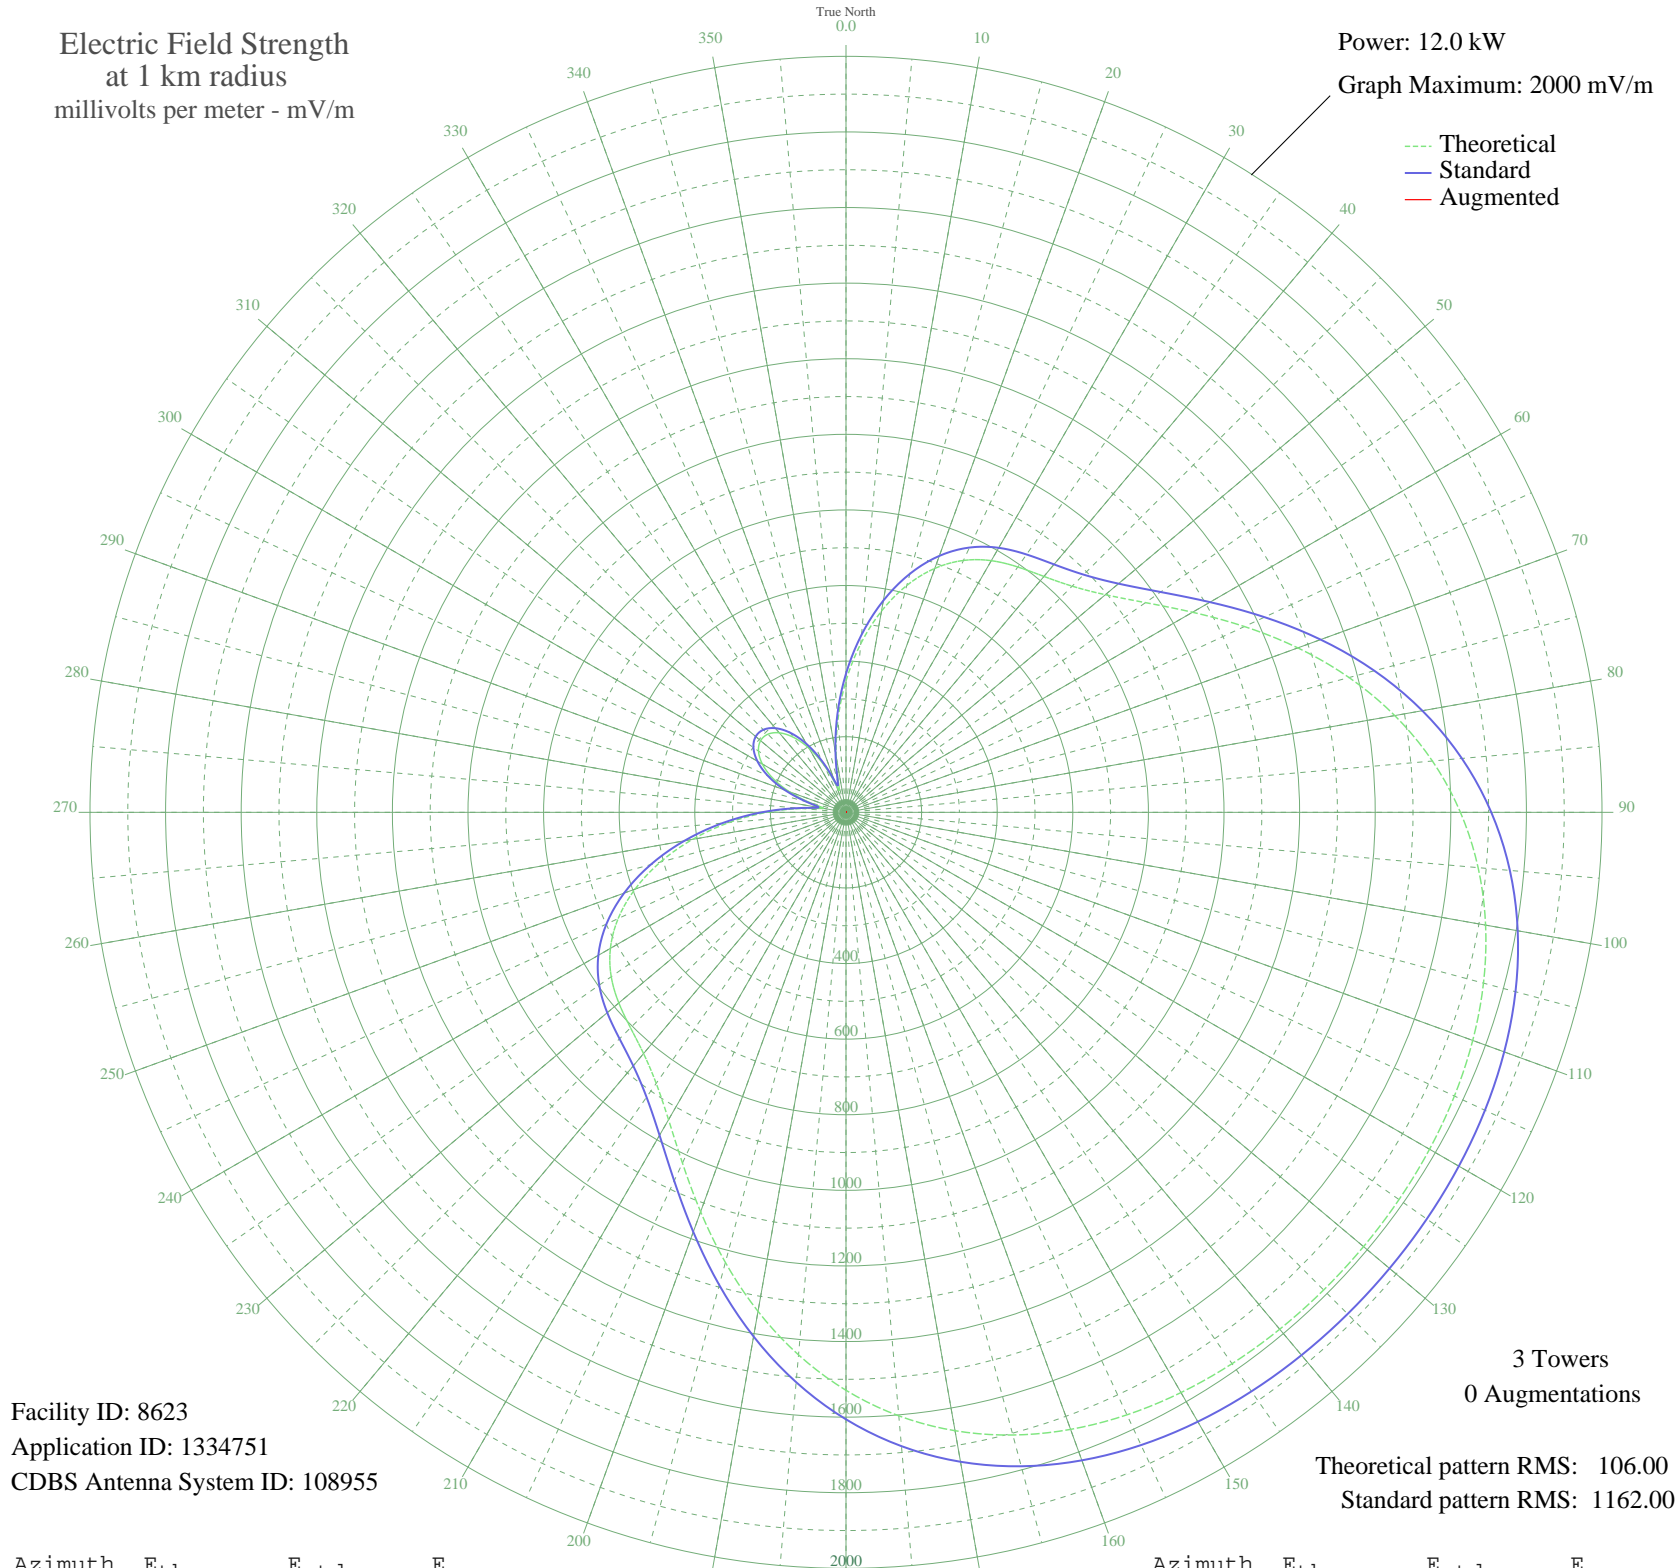

Facility ID: 8623
Application ID: 1334751
CDBS Antenna System ID: 108955

Theoretical pattern RMS: 106.00
Standard pattern RMS: 1162.00

Azimuth	E _{theo}	E _{std}	E _{aug}
0	347.64	366.83	
5	447.74	471.53	
10	540.54	568.73	
15	621.34	653.42	
20	686.69	721.94	
25	735.28	772.90	
30	768.77	808.02	
35	792.37	832.78	
40	814.71	856.21	
45	846.16	889.22	
50	895.66	941.15	
55	967.20	1016.21	
60	1058.58	1112.10	
65	1163.03	1221.72	
70	1272.06	1336.15	
75	1377.77	1447.12	
80	1474.13	1548.26	
85	1557.27	1635.53	
90	1625.45	1707.11	
95	1678.67	1762.97	
100	1718.16	1804.44	
105	1745.96	1833.62	
110	1764.43	1853.01	
115	1775.94	1865.10	
120	1782.58	1872.07	
125	1786.01	1875.66	
130	1787.33	1877.05	
135	1787.05	1876.75	
140	1785.06	1874.67	
145	1780.64	1870.02	
150	1772.46	1861.44	
155	1758.71	1847.00	
160	1737.15	1824.37	
165	1705.41	1791.05	
170	1661.17	1744.61	
175	1602.66	1683.18	

Azimuth	E _{theo}	E _{std}	E _{aug}
180	1529.01	1605.87	
185	1440.81	1513.29	
190	1340.52	1408.02	
195	1232.81	1294.96	
200	1124.45	1181.23	
205	1023.76	1075.56	
210	938.92	986.53	
215	875.38	919.87	
220	833.15	875.56	
225	806.16	847.25	
230	784.53	824.56	
235	758.20	796.94	
240	719.69	756.55	
245	665.08	699.28	
250	593.89	624.64	
255	508.29	534.94	
260	412.27	434.41	
265	310.85	328.41	
270	209.75	223.22	
275	116.93	128.05	
280	60.65	73.34	
285	97.64	108.78	
290	159.78	171.66	
295	214.09	227.72	
300	255.53	270.76	
305	282.67	299.03	
310	294.98	311.85	
315	292.27	309.03	
320	274.59	290.61	
325	242.22	256.92	
330	195.89	208.88	
335	137.76	149.15	
340	77.11	88.76	
345	71.96	83.85	
350	148.58	160.20	
355	245.70	260.54	

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

10 Nov 2011

Prepared by Audio Division, Media Bureau
Federal Communications Commission