


WGET GETTYSBURG, PA BL-- 1320 kHz

Daytime

Electric Field Strength
at 1 km radius
millivolts per meter - mV/m

Power: 1.0 kW
Graph Maximum: 500 mV/m

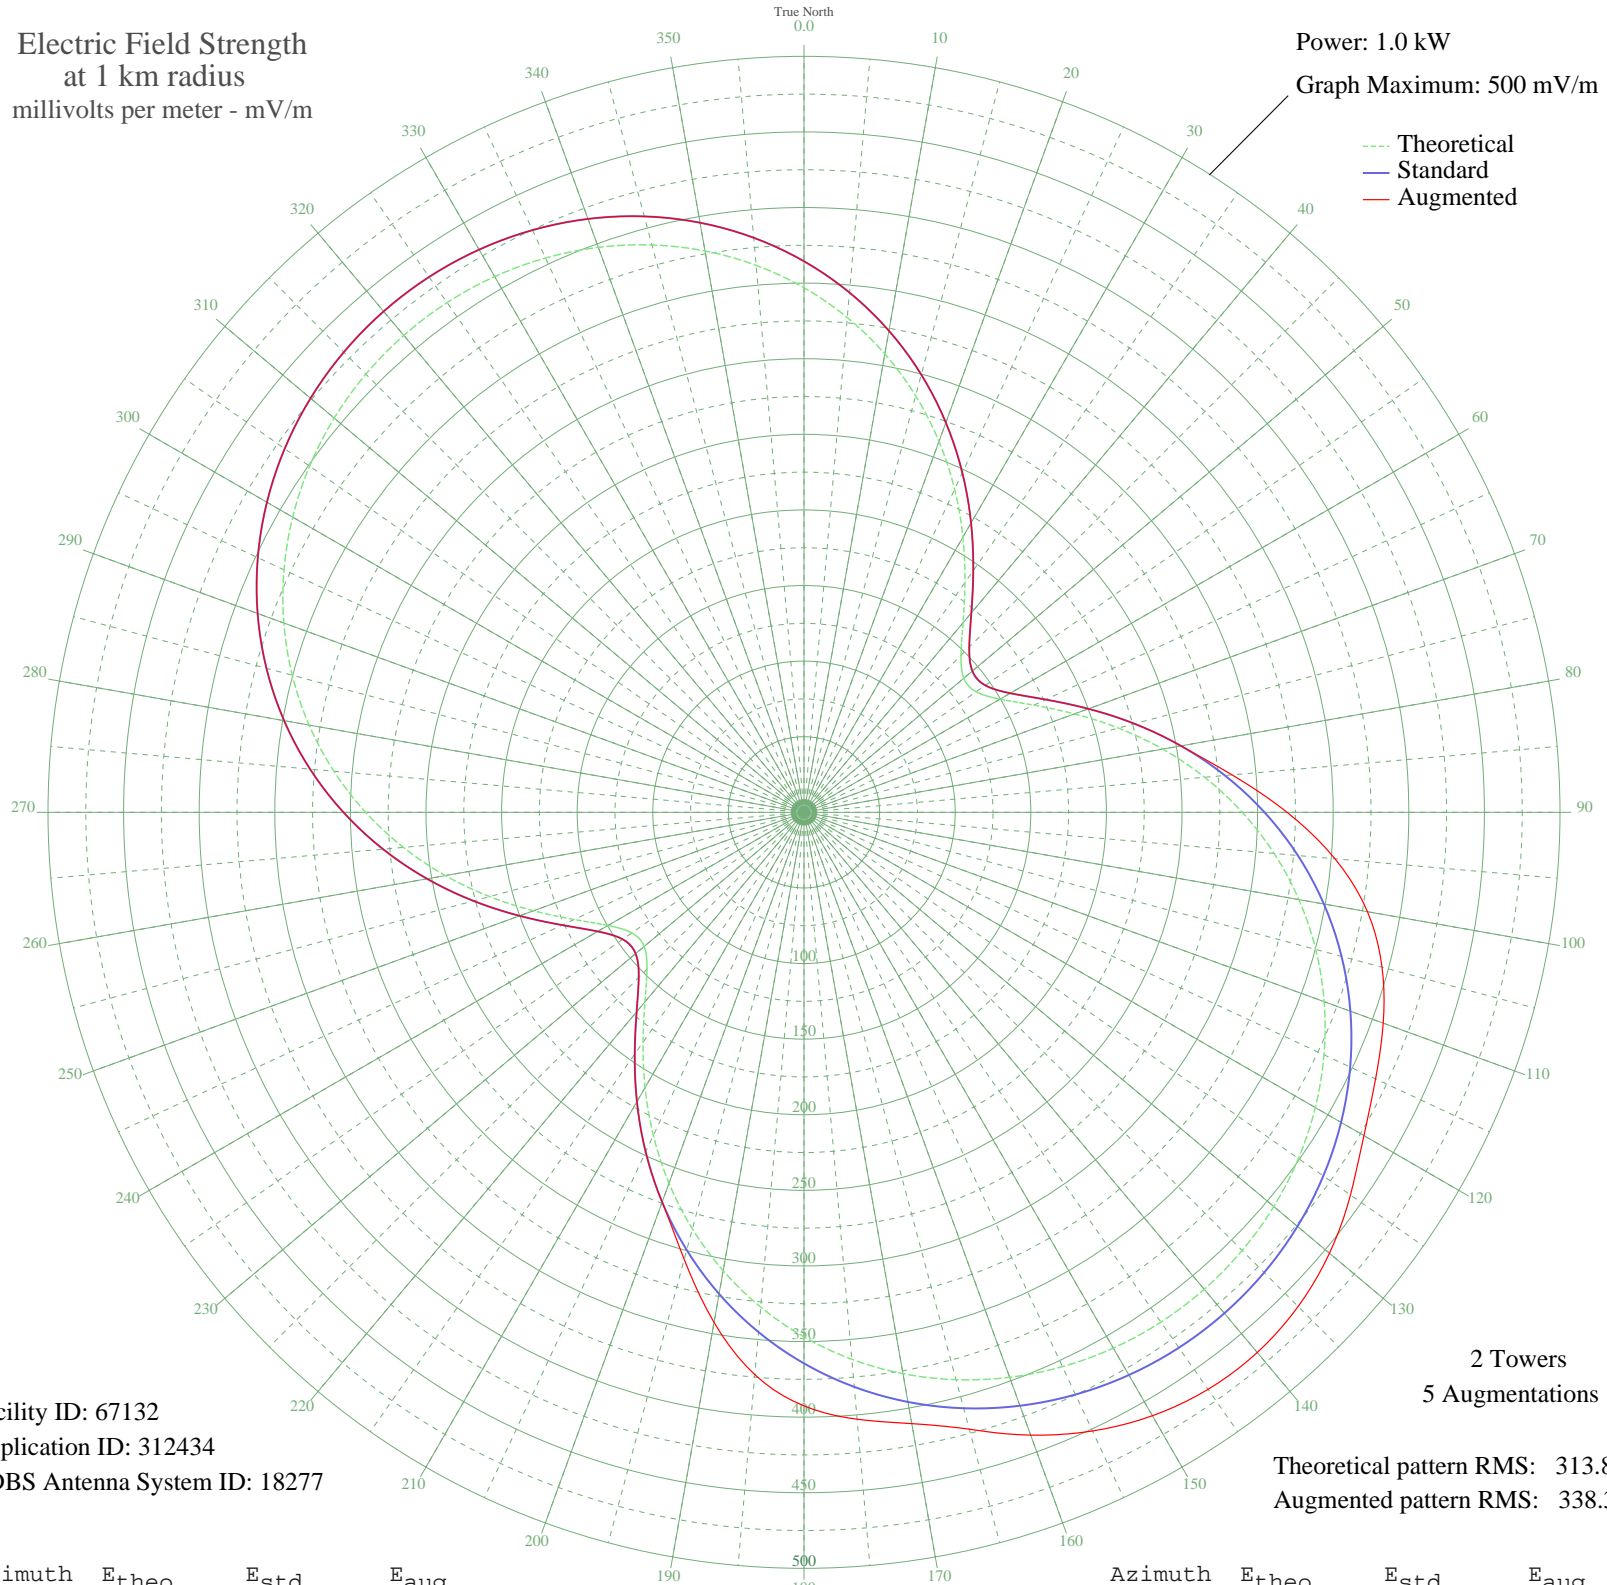

Facility ID: 67132
Application ID: 312434
CDBS Antenna System ID: 18277

Theoretical pattern RMS: 313.82
Augmented pattern RMS: 338.39

Azimuth	Etheo	Estd	Eaug
0	346.96	364.47	364.47
5	328.49	345.08	345.08
10	307.84	323.41	323.41
15	285.24	299.69	299.69
20	261.03	274.30	274.30
25	235.76	247.78	247.78
30	210.21	220.99	220.99
35	185.60	195.18	195.18
40	163.67	172.19	172.19
45	146.86	154.58	154.58
50	137.98	145.28	145.45
55	139.00	146.35	146.44
60	149.68	157.53	157.53
65	167.73	176.45	176.45
70	190.37	200.18	200.18
75	215.29	226.32	226.32
80	240.86	253.14	253.14
85	265.98	279.49	284.20
90	289.90	304.59	319.52
95	312.13	327.92	352.52
100	332.36	349.14	378.41
105	350.38	368.06	395.78
110	366.10	384.56	407.66
115	379.47	398.59	417.12
120	390.49	410.16	427.62
125	399.19	419.29	441.23
130	405.62	426.04	453.65
135	409.80	430.43	462.19
140	411.78	432.50	466.34
145	411.56	432.27	465.87
150	409.14	429.74	460.82
155	404.51	424.88	451.46
160	397.64	417.66	438.33
165	388.47	408.04	422.36
170	376.98	395.98	410.54
175	363.14	381.46	402.92

The theoretical pattern is used to create the standard pattern. Augmentations (if any) expand the standard pattern in specified directions. See Sections 73.150 and 73.152 of the FCC's Rules.

AM coverage may not mirror the pattern shown here. Additional factors such as ground conductivity or skywave propagation affect how far the AM signal will travel.

Patterns for stations outside the USA are based on notified parameters.

AM directional patterns created before 1982 used units of 1 mV/m at 1 mile, not one kilometer. The pattern values on such plots at 1 mile will be 0.62137 of the values listed here. Measured pattern values may vary from values shown here.

Plot is best printed on 11" by 17" or larger paper.

10 Nov 2011

Prepared by Audio Division, Media Bureau
Federal Communications Commission

Azimuth	Etheo	Estd	Eaug
180	346.96	364.47	392.56
185	328.49	345.08	373.31
190	307.84	323.41	342.56
195	285.24	299.69	306.10
200	261.03	274.30	274.30
205	235.76	247.78	247.78
210	210.21	220.99	220.99
215	185.60	195.18	195.18
220	163.67	172.19	172.19
225	146.86	154.58	154.58
230	137.98	145.28	145.45
235	139.00	146.35	146.44
240	149.68	157.53	157.53
245	167.73	176.45	176.45
250	190.37	200.18	200.18
255	215.29	226.32	226.32
260	240.86	253.14	253.14
265	265.98	279.49	279.49
270	289.90	304.59	304.59
275	312.13	327.92	327.92
280	332.36	349.14	349.14
285	350.38	368.06	368.06
290	366.10	384.56	384.56
295	379.47	398.59	398.59
300	390.49	410.16	410.16
305	399.19	419.29	419.29
310	405.62	426.04	426.04
315	409.80	430.43	430.43
320	411.78	432.50	432.50
325	411.56	432.27	432.27
330	409.14	429.74	429.74
335	404.51	424.88	424.88
340	397.64	417.66	417.66
345	388.47	408.04	408.04
350	376.98	395.98	395.98
355	363.14	381.46	381.46