



**Federal Communications Commission
Public Safety and Homeland Security Bureau**



General Information on VHF/UHF Narrowbanding



Narrowbanding Basics



- Who is affected by narrowbanding?
 - All Public Safety and Industrial/Business licensees in the 150-174 MHz and 421-512 MHz bands
- What do affected licensees have to do?
 - Either migrate to 12.5 kHz technology or utilize a technology that achieves equivalent efficiency



Timeline



- January 1, 2011 (Interim Deadline)
 - FCC will not accept applications for new systems using 25 kHz channels, or modification applications that expand the authorized contour of an existing 25 kHz station
 - FCC prohibition on manufacture, importation, or certification of equipment that includes a 25 kHz mode
 - Applications for Part 90 transmitter certification must certify that equipment meets a spectrum efficiency standard of one voice channel per 6.25 kHz of channel bandwidth
- January 1, 2013
 - All Public Safety and Industrial/Business licensees in the 150-174 MHz and 421-512 MHz bands must either migrate to 12.5 kHz technology or utilize a technology that achieves equivalent efficiency



A Brief History

- Process began in 1991
- Equipment required to be narrowband capable in 1996
- Second R&O (2003)
 - Licensees given deadlines to migrate to 12.5 kHz technology or utilize a technology that achieves equivalent efficiency
 - Non-Public Safety Deadline: January 1, 2013
 - Public Safety Deadline: January 1, 2018
- Third MO&O (2004)
 - Delayed all 2nd R&O interim deadlines to January 1, 2011
 - Accelerated public safety narrowbanding deadline from January 1, 2018 to January 1, 2013, consistent with the Industrial/Business deadline
 - The Commission found that the 10-year period from 2003 to 2013 was sufficient time to allow public safety to plan for transition and amortize existing equipment
 - The Commission noted that public safety commenters “unanimously” represented that they could meet the 2013 deadline



Reasons to Narrowband



-
- Opportunity
 - Compliance
 - Interoperability
 - Interference
 - Obsolescence




Opportunity



-
- Narrowbanding is intended to ensure more efficient use of the spectrum and greater spectrum access for public safety and non-public safety users




VHF - 150 MHz to 174 MHz

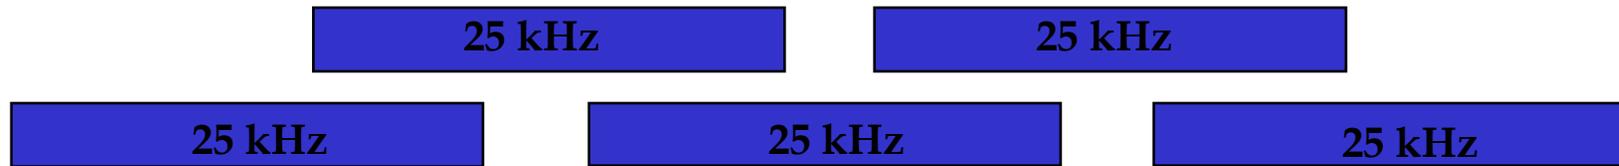

Prior to Narrowbanding

After Narrowbanding

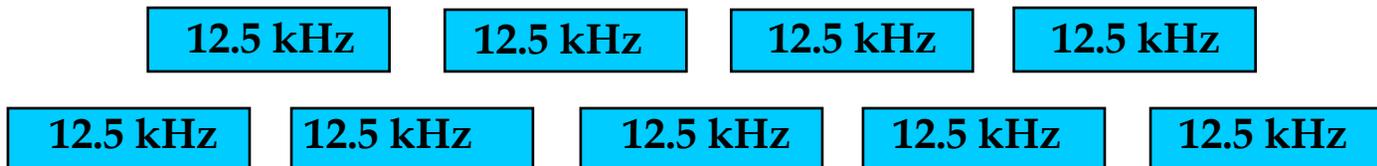



UHF - 450 MHz to 512 MHz



Prior to Narrowbanding



After Narrowbanding





Compliance



- Narrowbanding is mandatory
- Non-compliant stations are prohibited, not secondary
- Non-compliance can negatively impact public safety



Interoperability



- May not be able to communicate with systems operating on new narrowband channels
- Even if communications are possible they may be degraded
 - Wideband transmitter may overload narrowband receiver
 - Narrowband transmitter may not generate enough signal on wideband receiver



Interference



- In January 2013, 25 kHz channels will no longer be protected
- Continued wideband operations will not only violate FCC rules but also cause harmful interference to adjacent narrowband channels



Obsolescence



- The record in this proceeding indicated that 25 kHz equipment typically fully depreciates over a seven-year period
- Wideband-only equipment is at least 12 years old
- Wideband-capable equipment will not be available after 2011
- As a system ages support for the system becomes scarcer and more expensive



First Steps



- Assess whether 150 & 450 MHz channels meet long term needs – consider 700 & 800 MHz
- Since all equipment since 1997 has a narrowband mode, narrowbanding may require no more than programming.
- New VHF/UHF systems should be narrowband only



Path to Compliance



- Inventory equipment subject to narrowbanding
- Determine if additional sites will be needed to compensate for the narrower bandwidth
- Determine if pagers will require replacement
- Establish a schedule to meet the 2013 date
- Get a funding cycle approved
- Commission will provide guidance as to how license modification will occur



Funding



- Many grant programs have language that support operability and interoperability and or emergency communications components
- For additional information contact
 - DHS's Office of Emergency Communications
 - E-mail: oechq@dhs.gov
 - FEMA
 - www.fema.gov/grants



Additional Thoughts




- The Commission has declined, for the time being, to establish a schedule for the further migration from 12.5 kHz to 6.25 kHz
- The Commission has sought comment as to whether applications to modify a license to reduce the authorized bandwidth should be exempt from frequency coordination requirements. *See* Notice of Proposed Rulemaking and Order, WT Docket No. 07-100 (2007)
- In March 2009, PSHSB granted a waiver to permit the Town of New Haven, Vermont to reduce its bandwidth without frequency coordination
- On September 30, 2009, the National Public Safety Telecommunications Council submitted a petition for stay of the implementation of the January 1, 2011 interim deadlines



Narrowbanding Brochure



- Developed by IMSA and IAFC in 2006
 - 10,000 Print Copies Distributed
 - PDF Version Available On-Line

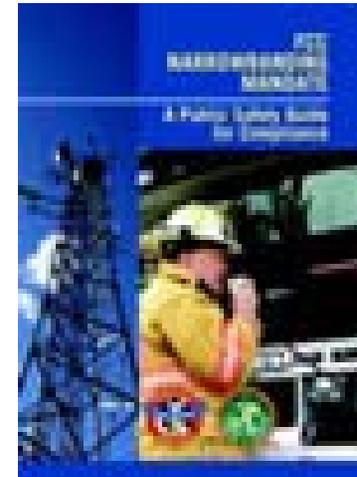

- Contents
 - Introduction to Narrowbanding
 - FCC's Narrowband Rules
 - Practical and Technical Considerations
 - Conclusions




Narrowbanding Brochure



- Short Read – Easy To Understand

- Ideal for end user
- Explains who, what and when
- Tool to support funding requests

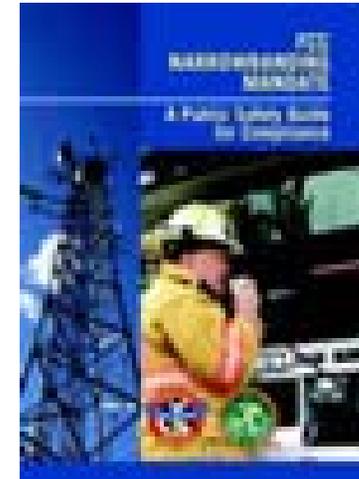

- Availability

- Download a PDF version from www.IMSAsafety.org
- Request print copies from IMSA at same site



Contacts



Roberto Mussenden

202-418-1428

Roberto.Mussenden@fcc.gov

Zenji Nakazawa

202-418-7949

Zenji.Nakazawa@fcc.gov

Bureau Website:

<http://www.fcc.gov/pshs/>